


ESCO
LIFESCIENCES



Labculture® G4

Class II Type A2 Biological Safety Cabinets

*The Most Advanced Energy-efficient, Safe,
and Ergonomic Biosafety Cabinet in the World*

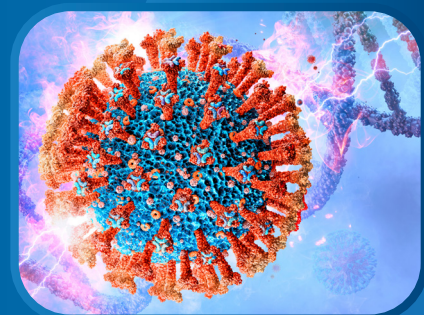

LABCULTURE® G4 (LA2 G4) CLASS II TYPE A2 BIOSAFETY




USB Port

- Export Data Logging
- Software Update
- Wired data transaction to BMS



Zero Volt Relay Contact

- Free Relay Contact
- Exhaust Free Relay Contact



Airflow Sensor

- Monitors real-time airflow for safety
- Alert the user if airflow is insufficient



Centurion 7" Capacitive Touchscreen Controller

- Displays all safety information on one large screen
- Shows cabinet parameters with intuitive 3D illustration
- Easy to use menu, similar to Smart Phone Apps
- Large buttons, easy to operate when wearing gloves
- Self-guidance to users to deal with specific situations
- Centered and angled down for easy reach and viewing
- Optional: 21 CFR Part 11 Compliance
- Wired data transaction to BMS



Single Piece Wall

- Easy to reach service fixtures and electrical outlets on sidewalls
- Large radius corners for easy cleaning



User-friendly Work Tray

- Largest useable area in the market
- Recessed to contain spillage
- Sloped perimeter for easy cleaning
- Large, easy to clean tray handle
- Work tray holder for drain pan cleaning



Raised Arm Rest

- Prevent grille blocking
- Comfortable working posture
- Durable stainless steel construction



Ergonomic Work Zone

- 10° angle to optimize user comfort, reduce glare, and maximize reach into the work area
- Brightly illuminated with >1200 lux (111 ft. cd)
- Industry-leading dimmable LED for optimum work comfort
- Airtight seal port for cable/tube exit protected by a negative pressure side wall



Esco Labculture® G4 Class II Type A2 Biosafety Cabinet
Available in 3 feet, 4 feet, 5 feet, and 6 feet models.

Standards
Compliance

CABINET, FEATURING ADVANCED TOUCHSCREEN CONTROLLER





Power Inlet socket

- Electrically easy to install with plug and play design

Energy-efficient DC ECM Blower

- The leading energy efficient Class II Type A2 Biosafety Cabinet in the world with 70% energy savings compared to AC motor
- Stable airflow despite building voltage fluctuations and filter loading
- Standby mode to further reduce power consumption by 80%

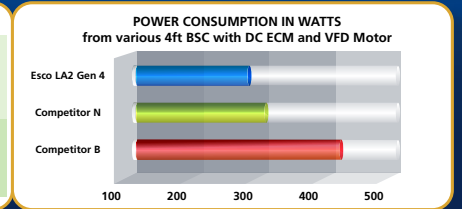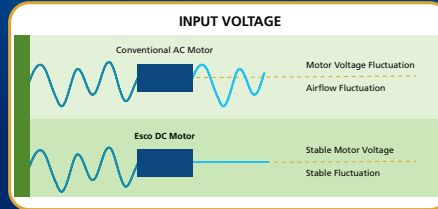

Advanced ULPA Filtration System

- 10x Filtration efficiency of HEPA filter
- Creates ISO Class 3 work zone instead of industry-standard ISO Class 5
- Same 10 years filter life and replacement cost as HEPA filters

Note:

- 99.999% at 0.1 to 0.3 micron, ULPA as per IEST-RP-CC001.3 USA
- 99.999% at MPPS, H14 as per EN 1822 EU



Dimmable LED

- Save energy and optimize work comfort



Removable Paper Catch

- Prevent objects from being pulled into blower plenum
- Removable for easy cleaning
- Optional pre-filter can be fitted



User Modified Pass-Through / Cable Port

- 3" Port with 1/4" hole on rubber membrane inside
- Surrounded by negative pressure
- Allows cables and tubes to exit with fully closed sash




Tray Support Beams

- Support work tray evenly for less vibration
- Cleaning holder to easily wipe the drain pan

ISOCIDE™ Powder Coat

- Silver-ion impregnated powder coat
- Inhibits microbial growth to improve safety
- Prevents the plenum from becoming biohazard landfill




Certification

Performance	Air Quality	Filtration	Electrical Safety	Electromagnetic Compatibility (EMC)
NSF / ANSI 49, USA	ISO 14644.1, Class 3, Worldwide US Fed Std 209E, Class 1 USA JIS B9920, Class 3, Japan	EN-1822 (H14), Europe IEST-RP-CC001, USA	UL 61010-1 3rd Ed, USA CSA22.2, No.1010-192, Canada IEC61010-1, Worldwide	EN IEC 61326-1 Group 1 / Class A

Dynamic Chamber™

- Blower plenum and side walls are surrounded by negative pressure
- Prevent contaminants from escaping outside


- Positive Pressure
- Negative Pressure



Cabinet Filtration System



- Ambient air is pulled through front grille to create inflow, without going into the work surface. Inflow is joined by half of the downflow, to create front air curtain that is fine-tuned to create a large performance envelope. The combined air stream travels through the back air column towards the blower.
- Approximately $\frac{1}{3}$ of the air in the common plenum is exhausted through the ULPA filter to the room. The remaining $\frac{2}{3}$ of the air is passed through the downflow ULPA filter and into the work area as a vertical laminar flow air to create ISO Class 3 work surface and prevents cross contamination.
- Near the work surface, the downflow splits. About half goes to the front grille, and half goes to the rear grille. A small portion enters the side capture zones to prevent dead air corners (small blue arrows).
- The design was optimized to give large performance envelope, that provides operator and product protection at wide Inflow and Downflow variation from the Nominal point.

The Performance Envelope Concept

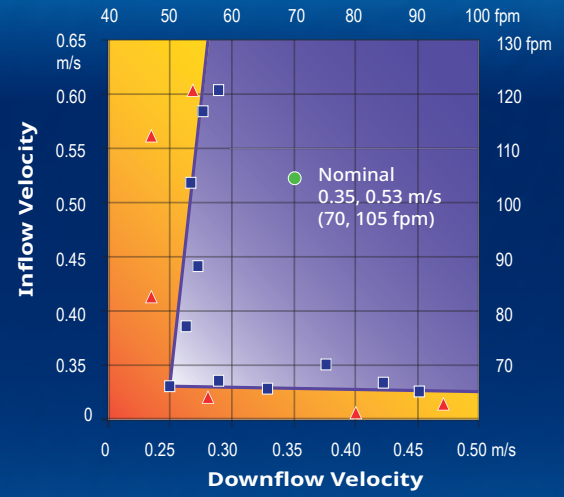


- Nominal Airflow
- Personnel / Product Protection
- Area of Personnel / Product Protection
- No Personnel / Product Protection
- Area of no Personnel / Product Protection

Engineering Drawing

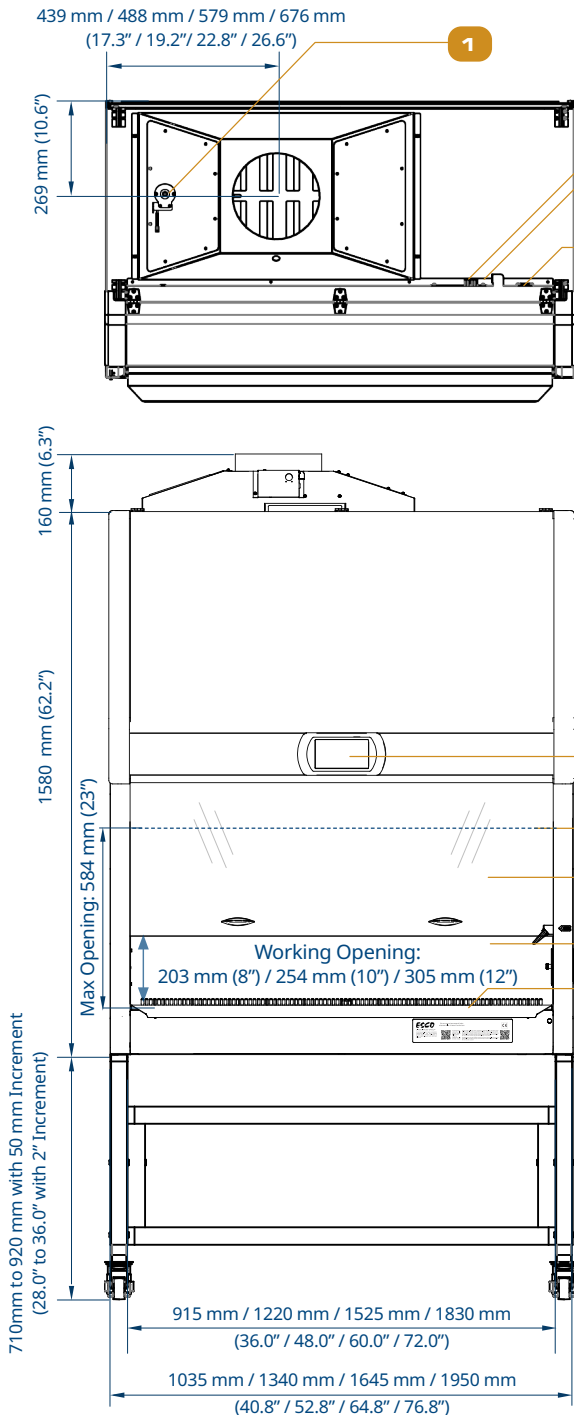

- Exhaust sensor
- USB Port
- Zero Volt Relay Contact
- Power Inlet (1qty for 3-4 ft, 2qty for 5-6 ft)
- Centurion Touchscreen Controller
- Maximum Sash Opening
- 10° Angled Sash Window
- Single-piece Stainless Steel Back Wall
- Single tray
- Electrical Panel
- Dimmable LED Lamp
- IV Bar Retrofit Kit Provision
- Service Fixture Retrofit Kit Provision
- Cable Port (NSF Approved)
- Stainless Steel Arm Rest
- Exhaust Collar (optional)
- Exhaust Filter
- DC ECM Blower
- Downflow Filter
- UV Lamp Provision
- Stainless steel side walls
- Electrical Outlet Provision
- Drain Valve Provision

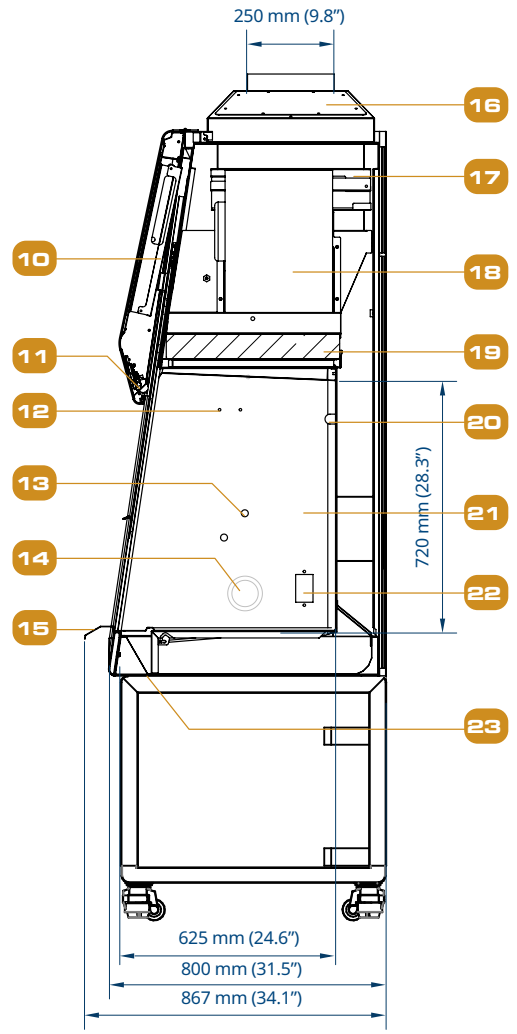

TECHNICAL SPECIFICATIONS

Labculture® Class II		Stainless Steel Side Walls		220-240 VAC, 50/60 Hz		220-240 VAC, 50/60 Hz		
				LA2-3S8 G4 8" 2011666	LA2-4S8 G4 8" 2011668	LA2-5S8 G4 8" 2011670	LA2-6S8 G4 8" 2011672	
External Dimensions (W x D x H)		Without Arm Rest		1035 x 800 x 1580 mm (40.8" x 31.5" x 62.2")	1340 x 800 x 1580 mm (52.8" x 31.5" x 62.2")	1645 x 800 x 1580 mm (64.8" x 31.5" x 62.2")	1950 x 800 x 1580 mm (76.8" x 31.5" x 62.2")	
		With Arm Rest		1035 x 867 x 1580 mm (40.8" x 34.1" x 62.2")	1340 x 867 x 1580 mm (52.8" x 34.1" x 62.2")	1645 x 867 x 1580 mm (64.8" x 34.1" x 62.2")	1950 x 867 x 1580 mm (76.8" x 34.1" x 62.2")	
Nominal Size				0.9 meter (3')	1.2 meter (4')	1.5 meter (5')	1.8 meter (6')	
Internal Dimensions (W x D x H)				915 x 625 x 720 mm (36.0" x 24.6" x 28.3")	1220 x 625 x 720 mm (48.0" x 24.6" x 28.3")	1525 x 625 x 720 mm (60.0" x 24.6" x 28.3")	1830 x 625 x 720 mm (72.0" x 24.6" x 28.3")	
Usable Work Area				0.47 m ² (5.0 sq. ft.)	0.63 m ² (6.8 sq. ft.)	0.79 m ² (8.5 sq. ft.)	0.94 m ² (10.3 sq. ft.)	
Sash Opening		Available in 203 mm (8"), 254 mm (10"), and 305 mm (12")						
Maximum Sash Opening		575 mm (22.6")						
Average Airflow Velocity		Inflow		203 mm (8")	0.53 m/s (105 fpm)			
				254 mm (10")	0.53 m/s (105 fpm)			
				305 mm (12")	0.53 m/s (105 fpm)			
Downflow		203 mm (8")	0.30 m/s (60 fpm)	0.30 m/s (60 fpm)	0.30 m/s (60 fpm)	0.30 m/s (60 fpm)		
		254 mm (10")	0.33 m/s (65 fpm)	0.30 m/s (60 fpm)	0.33 m/s (65 fpm)	0.30 m/s (60 fpm)		
		305 mm (12")	0.35 m/s (70 fpm)	0.30 m/s (60 fpm)	0.35 m/s (70 fpm)	0.35 m/s (70 fpm)		
Airflow Volume		Inflow		203 mm (8")	356 m ³ /h (210 cfm)	473 m ³ /h (280 cfm)	593 m ³ /h (350 cfm)	709 m ³ /h (420 cfm)
				254 mm (10")	446 m ³ /h (263 cfm)	591 m ³ /h (350 cfm)	741 m ³ /h (438 cfm)	887 m ³ /h (525 cfm)
				305 mm (12")	535 m ³ /h (315 cfm)	710 m ³ /h (420 cfm)	890 m ³ /h (525 cfm)	1065 m ³ /h (629 cfm)
Downflow		203 mm (8")	581 m ³ /h (345 cfm)	771 m ³ /h (461 cfm)	967 m ³ /h (567 cfm)	1156 m ³ /h (691 cfm)		
		254 mm (10")	639 m ³ /h (374 cfm)	848 m ³ /h (499 cfm)	1063 m ³ /h (624 cfm)	1272 m ³ /h (748 cfm)		
		305 mm (12")	678 m ³ /h (397 cfm)	771 m ³ /h (461 cfm)	1128 m ³ /h (662 cfm)	1349 m ³ /h (794 cfm)		
Exhaust		203 mm (8")	356 m ³ /h (210 cfm)	473 m ³ /h (280 cfm)	593 m ³ /h (350 cfm)	709 m ³ /h (420 cfm)		
		254 mm (10")	446 m ³ /h (263 cfm)	591 m ³ /h (350 cfm)	741 m ³ /h (438 cfm)	887 m ³ /h (525 cfm)		
		305 mm (12")	535 m ³ /h (315 cfm)	710 m ³ /h (420 cfm)	890 m ³ /h (525 cfm)	1065 m ³ /h (630 cfm)		
Additional Static Pressure for Optional Thimble Exhaust Collar (Measured 360mm or 14" from the top of exhaust collar)		203 mm (8")	15-25 Pa	25-35 Pa	20-30 Pa	40-50 Pa		
		254 mm (10")	20-30 Pa	35-45 Pa	25-35 Pa	55-65 Pa		
		305 mm (12")	25-35 Pa	45-55 Pa	40-50 Pa	65-75 Pa		
Required Exhaust with Optional Thimble Exhaust Collar		203 mm (8")	390 m ³ /h (230 cfm)	529 m ³ /h (311 cfm)	622 m ³ /h (366 cfm)	780 m ³ /h (459 cfm)		
		254 mm (10")	480 m ³ /h (283 cfm)	637 m ³ /h (375 cfm)	770 m ³ /h (453 cfm)	944 m ³ /h (556 cfm)		
		305 mm (12")	569 m ³ /h (335 cfm)	756 m ³ /h (445 cfm)	921 m ³ /h (542 cfm)	1133 m ³ /h (667 cfm)		
ULPA Filter Typical Efficiency		>99.999% at 0.1 to 0.3 micron, ULPA as per IEST-RP-CC001.3 USA >99.999% at MPPS, H14 as per EN 1822 EU						
Sound Emission (dBA)*		NSF / ANSI 49		203 mm (8")	57	57	60	63
				254 mm (10")	60	59	63	63.3
				305 mm (12")	62	60	65	65.9
LED Lamp Light Intensity		≥ 1000 lux (≥ 93 ft-cd)						
Electrical Rating (8)** 220-240 VAC 50/60Hz		Nominal power (Watt)		203 mm (8")	160	190	350	366
				254 mm (10")	195	201	374	420
				305 mm (12")	228	236	455	550
		Heat Load (BTU/hr)		203 mm (8")	546	648	1194	1249
				254 mm (10")	665	686	1276	1433
				305 mm (12")	778	805	1553	1877
Full Load Amps exclude 5A EO		203 mm (8")	6 A			10 A		
		254 mm (10")						
		305 mm (12")						
Electrical Rating (9)** 110-130 VAC 50/60Hz		Nominal power (Watt)		203 mm (8")	163	193	355	372
				254 mm (10")	203	205	380	421
				305 mm (12")	232	240	380	537
		Heat Load (BTU/hr)		203 mm (8")	556	659	1211	1269
				254 mm (10")	693	699	1297	1471
				305 mm (12")	792	819	1570	1832
Full Load Amps exclude 5A EO		203 mm (8")	10 A			15 A		
		254 mm (10")						
		305 mm (12")						
Optional Outlets FLA		5A						

*Noise reading in open field condition / anechoic chamber. Noise reading in normal room varies by room size, layout, and background noise, but may reach roughly 3-4 dBA above these values.

**Electrical power consumption is a measurement of new unit with clean filter operated within nominal setpoint. Result per unit may vary.

TECHNICAL SPECIFICATIONS


Labculture® Class II	Stainless Steel Side Walls	220-240 VAC, 50/60 Hz	LA2-3S8 G4 8" (2011666)	LA2-4S8 G4 8" (2011668)	LA2-5S8 G4 8" (2011670)	LA2-6S8 G4 8" (2011672)
			LA2-3S8 G4 10" (2011682)	LA2-4S8 G4 10" (2011684)	LA2-5S8 G4 10" (2011686)	LA2-6S8 G4 10" (2011688)
			LA2-3S8 G4 12" (2011714)	LA2-4S8 G4 12" (2011716)	LA2-5S8 G4 12" (2011718)	LA2-6S8 G4 12" (2011720)
	110-130 VAC, 50/60 Hz	LA2-3S9 G4 8" (2011667)	LA2-4S9 G4 8" (2011669)	LA2-5S9 G4 8" (2011671)	LA2-6S9 G4 8" (2011673)	
		LA2-3S9 G4 10" (2011683)	LA2-4S9 G4 10" (2011685)	LA2-5S9 G4 10" (2011687)	LA2-6S9 G4 10" (2011689)	
		LA2-3S9 G4 12" (2011715)	LA2-4S9 G4 12" (2011717)	LA2-5S9 G4 12" (2011719)	LA2-6S9 G4 12" (2011721)	
Cabinet Construction	Main body	Electro-galvanized steel with white oven-baked epoxy-polyester Isocide™ antimicrobial powder-coated finish, 1.5 mm (0.06") / 16 gauge thick				
	Work Zone	Stainless steel type 304 with no.4B finish, 1.5 mm (0.06") / 16 gauge thick				
	Sash Window	6 mm UV-absorbing Tempered Glass				
Net Weight		243 kg (536 lbs)	287 kg (633 lbs)	381 kg (840 lbs)	400 kg (882 lbs)	
Shipping Weight		304 kg (644 lbs)	360 kg (772 lbs)	451 kg (968 lbs)	506 kg (1116 lbs)	
Shipping Dimensions, Maximum (W x D x H)		1150 x 900 x 1900 mm (45.3" x 35.4" x 75")	1400 x 900 x 1900 mm (55.1" x 35.4" x 75")	1750 x 900 x 1900 mm (69" x 35.4" x 75")	2050 900 x 1900 mm (81" x 35.4" x 75")	
Shipping Volume		2.3 m³ (81.2 cu. ft.)	3 m³ (105.9 cu. ft.)	3.9 m³ (137.7 cu. ft.)	4.4 m³ (155.4 cu. ft.)	

Options and Accessories

Anti-blowback Valve 10 inches	EG Powder-Coated	ANTI-BLOW BACK VALVE 10" ABBV-10P 5170352			
	304 Stainless Steel	ANTI-BLOW BACK VALVE 10" ABBV-10S 5170354			
Exhaust Collar	ECO-F1-LA2/AC2/LR2/AR-3FT G4 5171097	ECO-F1-LA2/AC2/LR2/AR2/VA2-4FT G4 5171098	ECO-F1-LA2/AC2/LR2/AR2-5FT G4 5171099	ECO-F1-LA2/AC2/LR2/AR2/VA2-6FT G4 5171100	
UV Lamp	UV-15A (5170251)	UV-30A (5170255)			
IV Bar	IV-910 (5170499)	IV-1215 (5170231)	IV-1520 (5170500)	IV-1825 (5170501)	
Electrical Outlet	Direct Mounted	EO-H_			
	GFCI	EO-GFCI (5170071)			
Service Fixtures	EU SF-Gas-20 mm and Solenoid Valve	SF-1G20 (5170410)			
	EU SF-Vacuum-20 mm	SF-1V20 (5170457)			
	EU SF-Air-20 mm	SF-1A20 (5170502)			
	EU SF-Nitrogen-20 mm	SF-1N20 (5170503)			
	EU SF-Water-20 mm	SF-1W20 (5170458)			
	US SF-Universal-20 mm	SF-2U22 (5170504)			
	Copper Piping for SF	CU-Pipe (5170026)			
Support Stand (710 mm to 920 mm with 50 mm increment / 28.0" to 36.0" with 2" increment, combination of caster wheels and leveling feet with lock)	STA-3A0 5131340	STA-4A0 5131341	STA-5A0 5131427	STA-6A0 5131389	
Stainless Steel Pipette Storage Shelf	5260327				
Arm Rest Padding	MEWREST (5170127)				
Foot Rest	FT-REST (5170073)				
Laboratory Chair	ME-LD-AR360 (1150006)				
IQOQ Protocol	9010179				



ABBV_



ECO-F-LA2-4 G4



UV-_A-L




IV_



EO-H_



EO-GFCI



SF-1_



SF-2U_



STA_




SS Pipette Storage Shelf



MEWREST



FT-REST



ME-LD-AR360



IQOQ

Improving Lives Through Science

**DIRECT
MANUFACTURER**



- Animal Research Workstation
- Biosafety Safety Cabinet
- CO₂ Incubator
- Ducted Fume Hood
- Ductless Fume Hood
- Filtered Storage Cabinet
- Laboratory Centrifuge
- Laboratory Oven and Incubator

- Laboratory Refrigerator and Freezer
- Laboratory Shaker
- Laminar Flow Cabinet
- PCR Cabinet
- PCR Thermal Cycler
- Powder Weighing Balance Enclosure
- Ultra-low Temperature Freezer

ESCO

LIFESCIENCES

- Airflow Containment
- Cross-Contamination Facility Integrated Barrier
- Isolation Containment
- Ventilation Containment
- Radiopharmacy

- Adherent Cell Bioreactors
- Adherent Automated Cell Harvesting System
- Cell Culture Monitoring Tools
- Single-use Consumables for Bioprocessing



ESCO

MEDICAL

- Time-Lapse Incubator
- Benchtop Incubator
- ART Workstation
- CO₂ Incubator
- Anti-Vibration Table
- Gas Analyser
- Centrifuges


ESCO

ASTER



ESCO LIFESCIENCES GROUP

42 LOCATIONS IN 21 COUNTRIES ALL OVER THE WORLD

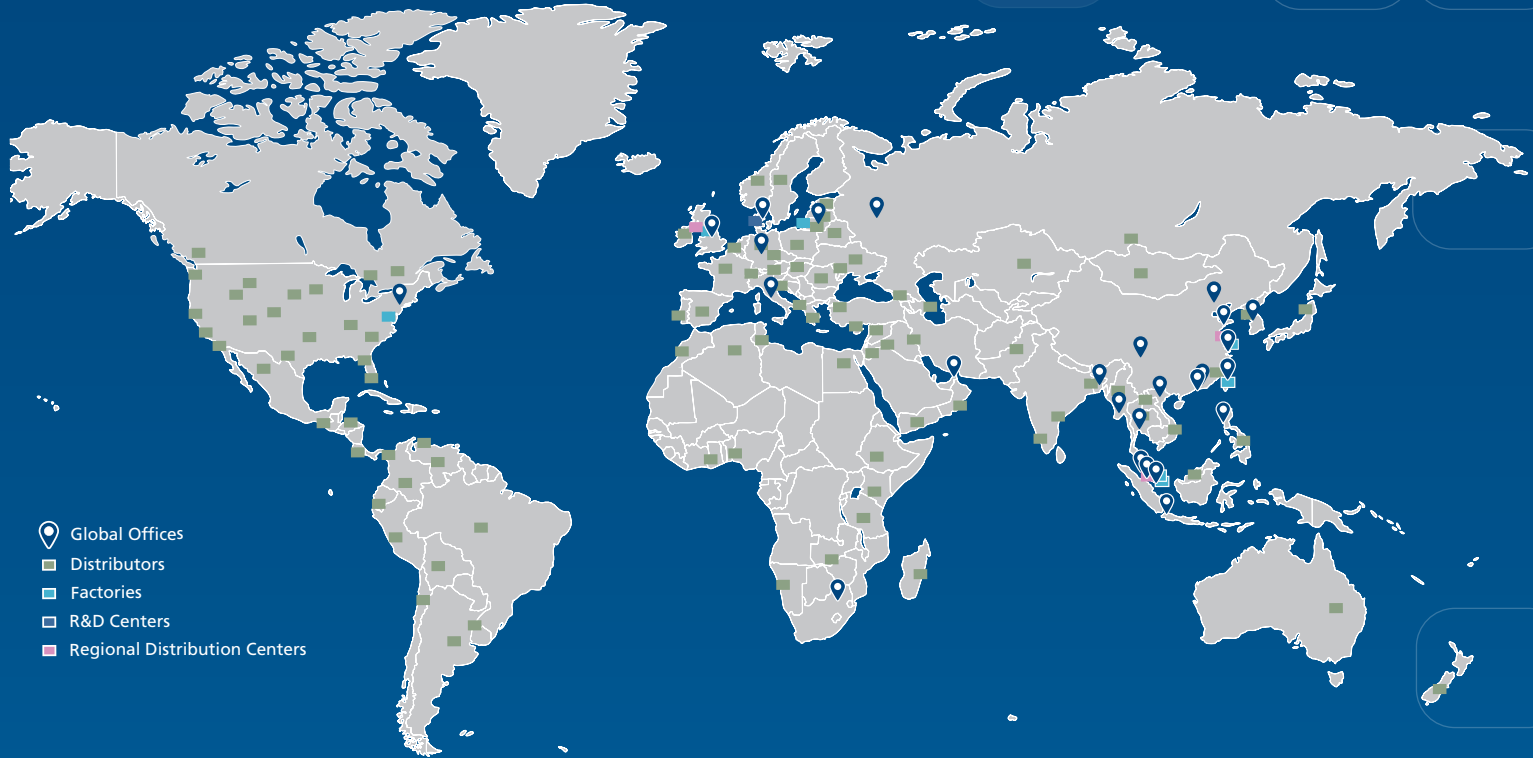

- 📍 Global Offices
- 🟩 Distributors
- 🟦 Factories
- 🟩 R&D Centers
- 🟪 Regional Distribution Centers

FOLLOW US ON SOCIAL MEDIA, DOWNLOAD OUR APPS,
AND SCAN THE QR CODE FOR MORE INFO.



@EscoLifesciences



@EscoLifesciences



@EscoLifesci



@Esco



@EscoLifesciences



@EscoLifesciences



Esco Lifesciences



Esco Lifesciences

ESCO

LIFESCIENCES GROUP

Esco Micro Pte. Ltd. • 19 Changi South Street 1 • Singapore 486779

Tel +65 6542 0833 • mail@escolifesciences.com

www.escolifesciences.com

Esco Technologies, Inc. • 903 Sheehy Drive, Suite F, Horsham, PA 19044, USA

Tel: +1 215-441-9661 • eti.admin@escolifesciences.com

Esco Lifesciences Group Offices: Bangladesh | China | Denmark | Germany | Hong Kong | India | Indonesia | Italy | Japan | Lithuania | Malaysia | Myanmar | Philippines | Russia | Singapore | South Africa | South Korea | Taiwan | Thailand | UAE | UK | USA | Vietnam

9010598_Labculture Gen 4-BSC-Global-A4_vD_112625

Esco can accept no responsibility for possible errors in catalogues, brochures and other printed materials. Esco reserves the right to alter its products and specifications without notice. All trademarks and logotypes in this material are the property of Esco and the respective companies.

